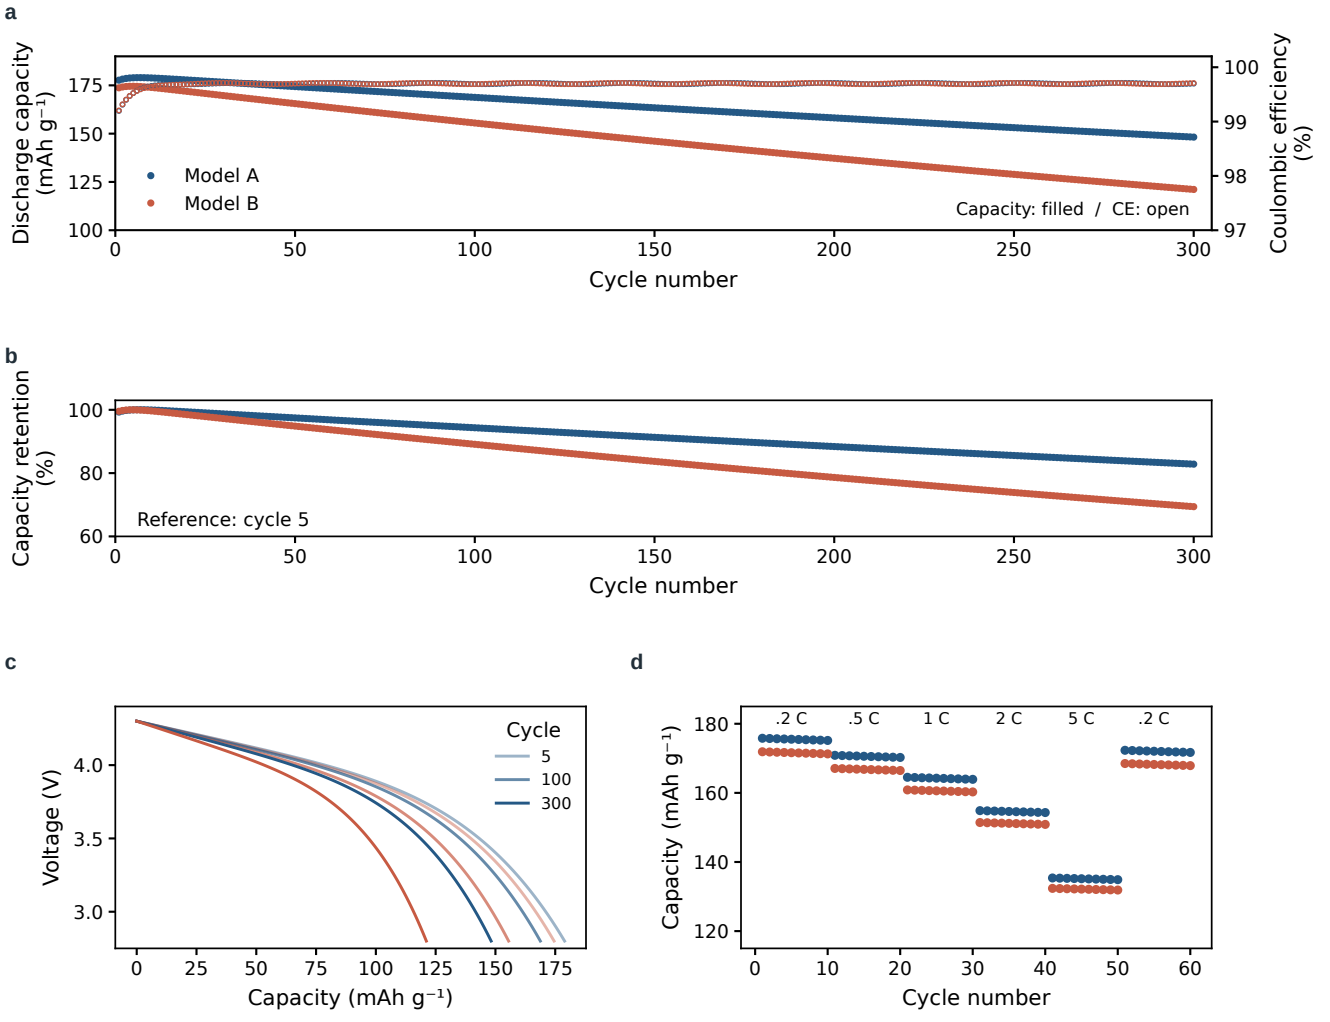

a
Discharge capacity (mAh g⁻¹)
Coulombic efficiency (%)
Model A
Model B
Capacity: filled / CE: open
Cycle number
b
Capacity retention (%)
Reference: cycle 5
Cycle number
c
Voltage (V)
Cycle
5
100
300
Capacity (mAh g⁻¹)
d
Capacity (mAh g⁻¹)
.2 C
.5 C
1 C
2 C
5 C
.2 C
Cycle number