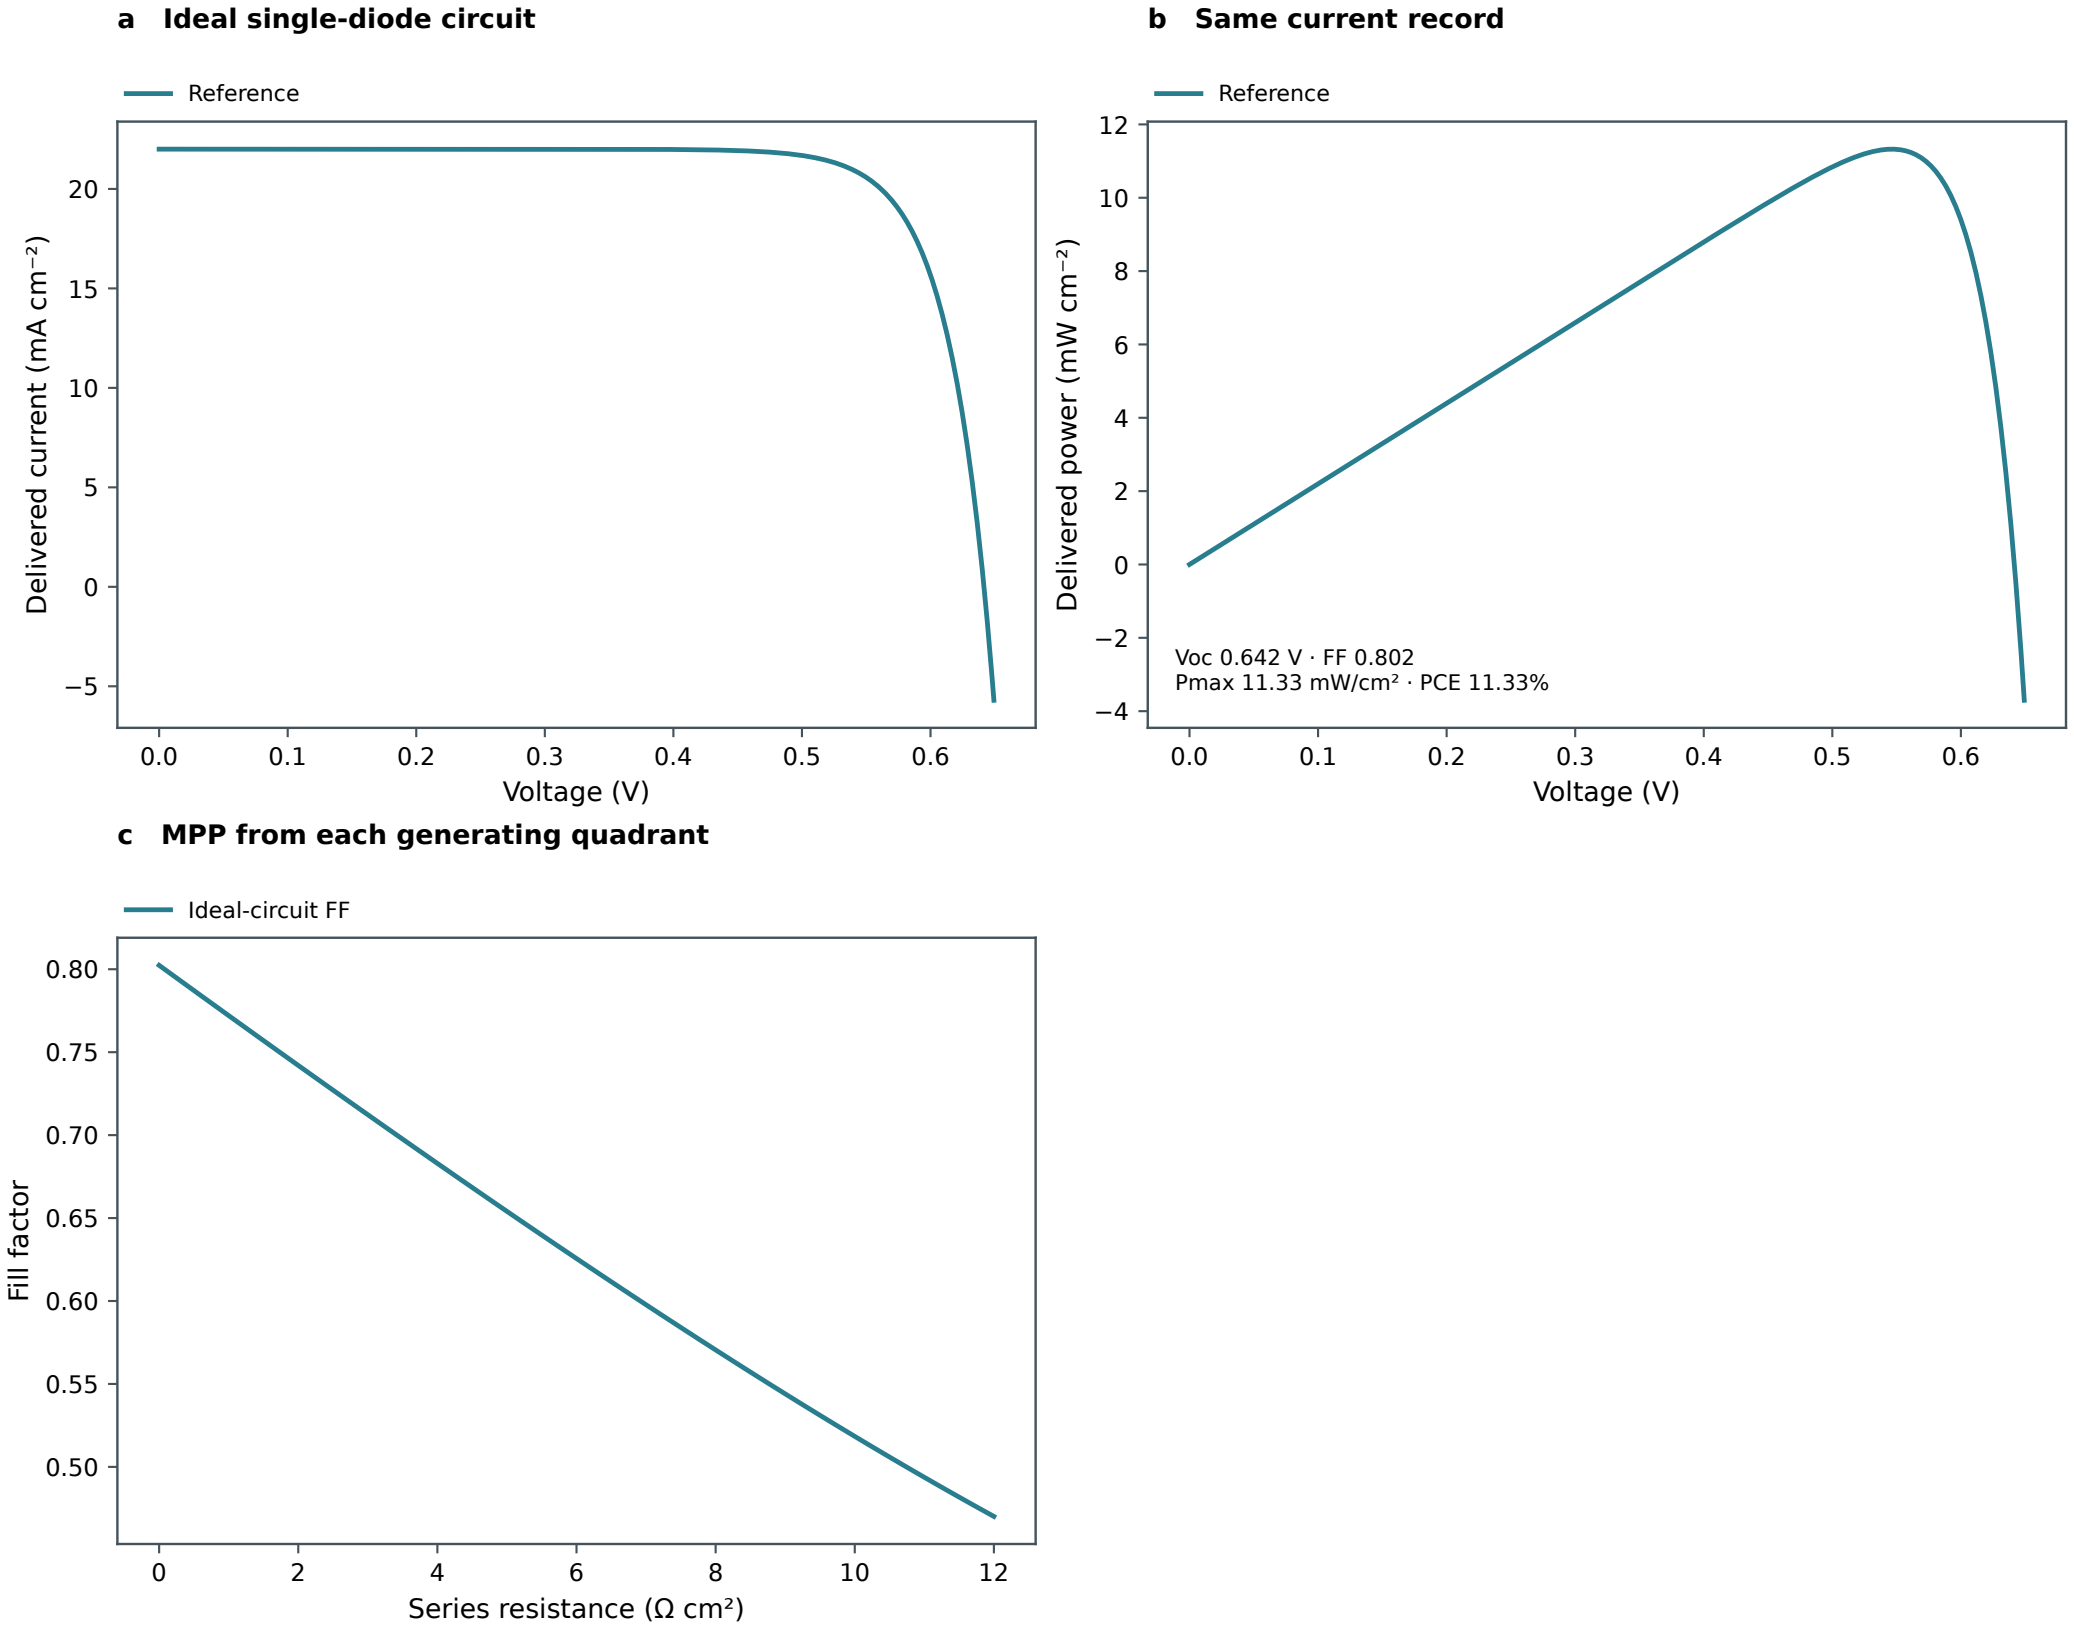

a Ideal single-diode circuit
Reference
Delivered current (mA cm⁻²)
Voltage (V)
b Same current record
Reference
Delivered power (mW cm⁻²)
Voltage (V)
Voc 0.642 V · FF 0.802
Pmax 11.33 mW/cm² · PCE 11.33%
c MPP from each generating quadrant
Ideal-circuit FF
Fill factor
Series resistance (Ω cm²)